



VITODENS 200-W

VIESMANN

CE-0085BR0432 Gas-Brennwertheizgerät

DIN EN 483, 677 B₂₃, B₃₃, C_{13X}, C_{33X}, C_{43X}, C_{53X}, C_{63X}, C_{83X}


P_{min.} (80/60 °C) 4,3 kW / P_{max.} (80/60 °C) 17,2 kW / Q_{min.} (H_i) 4,5 kW
P_{min.} (50/30 °C) 4,8 kW / P_{max.} (50/30 °C) 19,0 kW / Q_{max.} (H_i) 17,9 kW

Herstell-Nr. / N° de fabrication / Serial no.

WB2B

7423008002057103

5369 209-01

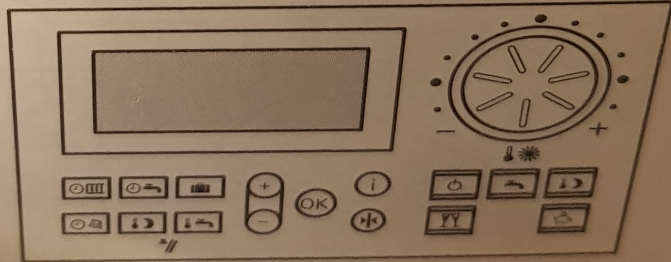

Temp.
verdünn
ungsgr.
-Temp.
unkt

11,9 %

Abgas

17.11.21 14:52

53,5 °C	AT
8,67 %	CO ₂
1,3 %	qA +
1,37	λ
5,7 %	O ₂
19 ppm	CO
0,285 mbar	Zug
26 ppm	CO _{unv}
98,7 %	η +
16,0 °C	VT
53,5 °C	ATP

techniker

Herr Stroncsek

17 7019